


GRAB BARS

Vertical swing grab bar



ITEM: 15.221.S

- ·Recommended for use in bathrooms, WC and showers.
- ·Suitable for bathrooms adapted to disabled.
- · AISI 304 stainless steel satin finish.
- ·Highest durability and rusting resistance.
- ·Other models available: 700 mm / 800 mm.




COMPONENTS & MATERIALS

- •Made of AISI 304 stainless steel, satin finish.
- ·Length: 600 mm.
- •Ø32 mm tube grab. Steel thickness: 1,2 mm.
- •Recommended installation height: 70-75 cm from floor.
- ·Stainless steel screws and volts for masonry walls.
- •Incorporates 6 screws holes for wall mounting.
- ·With brake and paper holder.

TECHNICAL SPECIFICATIONS

Dimension	see version table
Bar tube	Ø32 mm
Bar tube thickness	1.2 mm
Mounting flange	100x300 mm
Mounting flange thickn	ess 0.8 mm

TECHNICAL DRAWING

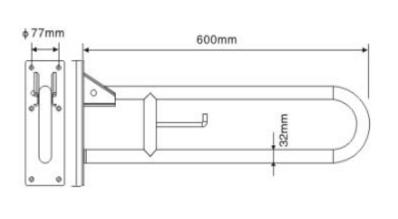

Tel: +86 571 888 685 70 Fax: +86 571 888 685 71 hotec@cnhotec.com www.cnhotec.com